

# FRAMES FOR DRYWALL

## SERIES: DW9000

Fire rated frames up to 180 minutes UL Certified UL10B-UL10C

Specifically designed to be installed in Dry Wall walls.




Screw base anchor (SBA).



Drywall strap anchor (DSA).



Knock-down (KD) assembly with tabs and compression anchor.

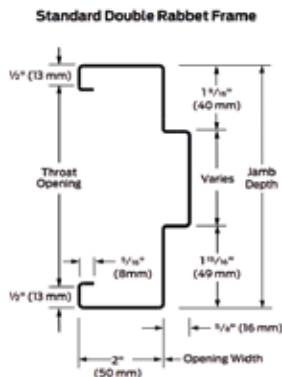

### Standard Features

- Manufactured in 16-gauge sheets - G40 Galvanized or AZ40 Galvalume.
- Frame sides are: Hinge jamb, strike jamb or latch side and head.
- Front or continuous welded frame (With modular (KD) option).
- Hinge reinforcements and weld-on anchors.
- Compression anchors for KD frames (Knock-Down), must be specified by the customer.

### Main Features

- Double rabbet construction.
- Primer finish.

### Fire Resistance

- Fire-rated of up to 180 minutes, UL certified .

### Hardware Reinforcements

- Hinges: 10 Gauge.
- Door Closers: 12 Gauge .
- Lock: 16 Gauge.

### Optional

- Galvanized Steel G90.
- Power-Coating Finishes.
- Non-standard sizes.

### Standard Colors:



Embossed Black  
Ral 9005



Embossed Brown  
Ral 8019



Gray  
Ral 7012




Embossed Gray  
Ral 7004



Red  
Ral 3001



Embossed Beige  
Ral 1013



Embossed White  
Ral 9003



Matte White  
Ral 9003